

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/272380794>

# CO<sub>2</sub>-ECBM: A review of its status and global potential

Article in *Energy Procedia* · December 2014

DOI: 10.1016/j.egypro.2014.11.619

CITATIONS

93

READS

1,044

3 authors, including:



Michael Godec

Advanced Resources International

70 PUBLICATIONS 750 CITATIONS

[SEE PROFILE](#)



George Koperna

Advanced Resources International

81 PUBLICATIONS 804 CITATIONS

[SEE PROFILE](#)

Some of the authors of this publication are also working on these related projects:



Enhanced Oil Recovery [View project](#)



Eastern US Gas Shales [View project](#)

GHGT-12

CO<sub>2</sub>-ECBM: A Review of its Status and Global PotentialMichael Godec<sup>a</sup>, George Koperna<sup>a</sup>, and John Gale<sup>b</sup><sup>a</sup> Advanced Resources International, 4501 Fairfax Drive, Suite 910, Arlington, VA 22203 USA<sup>b</sup> IEA Greenhouse Gas R&D Programme, Pure Offices Cheltenham Office Park, Hatherley Lane, Cheltenham, GLOS, GL51 6SH, UK**Abstract**

In 1998, the IEA Greenhouse Gas R&D Programme (IEAGHG) assessed the global potential for CO<sub>2</sub> enhanced coal bed methane (CO<sub>2</sub>-ECBM) recovery and associated CO<sub>2</sub> storage based on data from the one successful pilot project at the time in the San Juan Basin in the USA. After 1998, subsequent CO<sub>2</sub> injection projects in coal seams were generally determined not to be successful. Nonetheless, these projects contributed to “lessons learned” that helped advise further research and demonstration (R&D) activities.

IEAGHG recently reassessed the status of R&D in CO<sub>2</sub>-ECBM and CO<sub>2</sub> storage. In this assessment, the primary objectives were to: (1) assess the global status of coalbed methane (CBM) production and the potential effects on CO<sub>2</sub> storage; (2) review the current status of research into the enhanced gas recovery (EGR) and geological storage of CO<sub>2</sub> in coals; and (3) develop an updated assessment of the global potential for EGR and geological storage of CO<sub>2</sub> in coal formations.

The paper summarizes the results of this work, along with other related activities. It reviews the results from more recent CO<sub>2</sub>-ECBM and CO<sub>2</sub> storage trials in the San Juan Basin in the USA, the results of other small-scale demonstration projects conducted by the U.S. Department of Energy’s (DOE’s) Regional Carbon Sequestration Partnerships (RCSP) Program, and reviews the status of an ongoing DOE-funded project conducted by CONSOL and Virginia Tech University in the USA, as well as for the Coal-Seq Consortium.

The IEAGHG study concluded that the technical recovery potential for methane from the world’s coal seams is estimated to be 79 trillion cubic meters (Tcm) globally, 29 Tcm associated with conventional CBM recovery, and 50 Tcm from the application of CO<sub>2</sub>-ECBM recovery as a secondary production technique. This could facilitate the potential storage of nearly 488 billion metric tons (or gigatonnes (Gt)) of CO<sub>2</sub> in unmineable coal seams.

**1. Introduction**

In the early 1990s, Puri and Lee [1] and MacDonald [2], separately, proposed the concept of enhanced coalbed methane (ECBM) recovery involving injection of nitrogen (N<sub>2</sub>) and/or carbon dioxide (CO<sub>2</sub>) to increase recovery of methane from coals without excessively lowering reservoir pressure. The concept of ECBM using CO<sub>2</sub> predates this; in 1972, Every and Dell’osso [3] found that methane was effectively removed from crushed coal by flowing a stream of CO<sub>2</sub> through it at ambient temperature.

© 2014 The Authors. Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/3.0/>).

Peer-review under responsibility of the Organizing Committee of GHGT-12

\*Corresponding Author: Michael Godec. Tel.: 01-703-528-8420; fax: 01-703-528-0439  
E-mail address: [mcodec@adv-res.com](mailto:mcodec@adv-res.com)

**Keywords:** CO<sub>2</sub> storage; coal seams; storage capacity; enhanced coalbed methane, ECBM


Thus, coal deposits have long been regarded as a potential CO<sub>2</sub> storage option, particularly in association with ECBM production. In 1998, the IEA Greenhouse Gas R&D Programme (IEAGHG) assessed the global potential for CO<sub>2</sub>-ECBM based on data from the one successful pilot project at the time in the San Juan Basin in the USA [4]. At that time, it was concluded that there was significant geological storage capacity globally in unmineable coal seams. In a recent review of opportunities by the Carbon Sequestration Leadership Forum (CSLF) of CO<sub>2</sub> utilization options, however, ECBM with CO<sub>2</sub> injection was not even included [5]; whereas ten years before, CO<sub>2</sub>-ECBM was considered a viable option for CO<sub>2</sub> storage. So – what happened?

After the IEAGHG assessment in 1998, several CO<sub>2</sub> injection projects in coal seams followed the initial San Juan Basin project in Canada, Poland and Japan, in thin bituminous coal seams. These projects were generally determined not to be successful. The reasons cited for this vary, but included swelling of the coal due to the presence of CO<sub>2</sub> near the injection well, reducing permeability, and thus impacting injectivity and limiting methane desorption. In addition, there were some design and implementation issues impacting project performance in these tests. Nonetheless, all contributed to “lessons learned” that help advise R&D activities. Subsequent research and pilot testing has built upon these lessons, with notable success.

IEAGHG recently looked at CO<sub>2</sub>-ECBM once again [6]. In this assessment, summarized in this paper, some of the primary objectives related to CO<sub>2</sub> storage in coal seams were to: (1) assess the global status of coalbed methane (CBM) production and the potential effects on CO<sub>2</sub> storage; (2) review the current status of research into geological storage of CO<sub>2</sub> in coals; and (3) assess the global potential for geological storage of CO<sub>2</sub> in coal formations.

## 2. Factors Influencing CO<sub>2</sub> Storage and Enhanced Gas Recovery in Coal Seams

The process of ECBM and storage of CO<sub>2</sub> in coal seams involves capturing CO<sub>2</sub> from a flue gas stream, compressing it for transport to an injection site, followed by injection of CO<sub>2</sub> into the coal to enhance methane recovery and/or store CO<sub>2</sub>. Methane desorbs from the micropores of the coal matrix when the hydrostatic pressure is reduced, such as from the drilling of a well, and flows through the cleats to a well bore. The main methods which can induce methane release from coal formations are to reduce the overall pressure, usually by dewatering the formation, generally through pumping; or to reduce the partial pressure of the methane by injecting another inert gas into the formation, such as CO<sub>2</sub>, where the methane on the surface gets displaced by the other gas, **Figure 1**

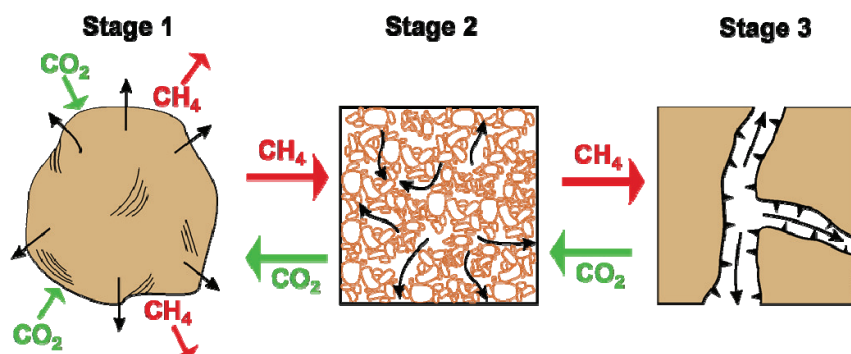

**Figure 1: Schematic of the Flow Dynamics of CO<sub>2</sub> and CH<sub>4</sub> in Coal Seams**

Dewatering and reservoir pressure depletion is a simple but relatively inefficient process, recovering less than 50% of the gas in place. Lowering the hydrostatic pressure in the coal seam accelerates the desorption process. Once dewatering has taken place and the pressure has been reduced, the released methane can be produced. CBM wells initially primarily produce water; then gas production eventually increases, while water production declines. Some wells do not produce any water and begin producing gas immediately, depending on the nature of the fracture system. Hydraulic fracturing or other completion enhancement methods are used to assist recovery but, even so, because permeability is normally low, many wells at relatively close spacing must be drilled to achieve economic gas production.

CBM production potential is determined by a number of factors that vary from basin to basin, and include fracture permeability, development history, gas migration, coal maturation, coal distribution, geologic structure, well completion options, hydrostatic pressure, and produced water management. In most areas, naturally developed fracture networks are the most sought after areas for CBM development. Areas where geologic structures and localized faulting have occurred tend to induce natural fracturing, which increases the production pathways within the coal seam.

When injected, CO<sub>2</sub> moves through the coal seam along its natural fractures (the cleat system), and from there diffuses to the coal micro-pores where it is preferentially adsorbed. In coal, CO<sub>2</sub> has a higher affinity to become adsorbed onto the reservoir rock surfaces than methane that is naturally found within them. Upon injection, the CO<sub>2</sub> displaces methane from some of the adsorption sites. The ratio of CO<sub>2</sub> to methane varies from basin to basin, but has been linked to the maturity of the organic matter in the coal. As much as another 20% could potentially be recovered through the application of CO<sub>2</sub>-ECBM [7]. In addition, the fact that some CBM is high in CO<sub>2</sub> content shows that, at least in some instances, CO<sub>2</sub> can safely remain stored in coal for geologically significant time periods.

### 3. Review of R&D and Project Experience Associated with ECBM and CO<sub>2</sub> Storage in Coal Seams

The most recent assessment by IEAGHG included a thorough review of the status of research into geological storage of CO<sub>2</sub> in gas shales and coals. This included review of the current understanding of the potential nature and rate of trapping processes; mechanisms of storing CO<sub>2</sub>, CO<sub>2</sub> injectivity into gas shales and coals, with reference to industry fracturing practices, and methods for assessing storage capacities for CO<sub>2</sub> storage in gas shales and coals.

The processes and technologies for ECBM and CO<sub>2</sub> storage are still in the development phase. In 2006, in support of a USDOE “Carbon Sequestration Technology Roadmap and Program Plan,” Advanced Resources developed a “Technology Design and Implementation Plan” for CO<sub>2</sub> storage in deep, unmineable coal seams. It provided a baseline of ongoing research and field tests in the area of CO<sub>2</sub> storage in coals at the time [8]. As part of this effort, information and opinions were gathered from a group of experts from industry, academia, and government via questionnaires. Based on a review of past and ongoing R&D related to CO<sub>2</sub> storage in coals, a review of major field projects at that time, and the input of the interviewed experts, key knowledge gaps and technical barriers were identified. While significant progress has been made concerning the key knowledge gaps and technical barriers identified, and some of the R&D needs and supporting tasks have been pursued, these knowledge gaps and technical barriers, along with the high priority R&D needs, still exist. These were:

1. A lack of globally disaggregate information on the available storage capacity in deep, unmineable coals.
2. A lack of guidelines for establishing location-specific criteria for defining “unmineable coals.”
3. A lack of sufficient, widely available geological and reservoir data for defining the favorable settings for injecting and storing CO<sub>2</sub> in coals, particularly the lack of data on deep coal depositional settings and reservoir properties.
4. Insufficient understanding the near-term and longer-term interactions between CO<sub>2</sub> and coals, and between N<sub>2</sub> and coals, particularly being able to develop site-specific models of coal swelling (reduction of permeability) in the presence of CO<sub>2</sub> and N<sub>2</sub>, coal shrinkage with release of methane (increase in permeability), and the physics of CO<sub>2</sub>/methane exchange under actual reservoir conditions of pressure and confinement.
5. Need for formulating and testing alternative reliable, high volume CO<sub>2</sub> and/or N<sub>2</sub> injection strategies and well designs, in multiple reservoir settings, to help reduce the number of wells required for storing significant volumes of CO<sub>2</sub>.
6. Integrating CO<sub>2</sub> storage and enhanced recovery of coalbed methane.

**CO<sub>2</sub>-ECBM and CO<sub>2</sub> storage trials in the San Juan Basin.** Several ECBM/CO<sub>2</sub> storage field-level tests on the injection and storage of CO<sub>2</sub> in coals, combined with ECBM, were conducted in the San Juan Basin of the USA.

- One of the longest-operated field pilots was the Allison Unit CO<sub>2</sub>-ECBM pilot [9]. During six years of operation (1995–2001), approximately 335,000 metric tons of CO<sub>2</sub> were injected into the 900 meter deep Fruitland coal seams. The project recovered 45 million cubic meters (1.6 Bcf) of incremental CBM and stored 270,000 metric tons of CO<sub>2</sub>. The main conclusions drawn from the project were: (1) CO<sub>2</sub> injection into coal can significantly improve methane recovery; recovery was improved from 77% (under traditional practices) to 95% (using CO<sub>2</sub> injection) of original gas in place within the central pilot area; (2) injectivity losses are likely when CO<sub>2</sub> is first introduced into the coal seam; initial CO<sub>2</sub> injectivity was reduced by 60% (with coal permeability reduced by an order of magnitude near the wells); the loss of CO<sub>2</sub> injectivity was modest and a steady rebound in CO<sub>2</sub> injectivity was noted with time as methane was produced; (3) improvements are required in reservoir simulation models to properly capture the interaction of CO<sub>2</sub> injection, methane release, and the coal reservoir; though existing reservoir simulation models provide a reasonable match of project performance; and (4) advances in well injectivity technology could unlock the massive CO<sub>2</sub> storage potential of CBM resources in deep coals; particularly if technology is developed to overcome reduced injectivity due to matrix swelling.
- The potential benefits of using CO<sub>2</sub>/N<sub>2</sub> mixtures to possibly overcome the limitations from swelling associated with injecting pure CO<sub>2</sub> was a primary feature of the Tiffany ECBM pilot [10]. BP (formerly Amoco) began to investigate ECBM techniques in the late 1980s. Building on laboratory and pilot tests, after nine years of primary CBM production, N<sub>2</sub> injection commenced in January 1998; utilizing ten newly drilled directional N<sub>2</sub> injection wells, and later into two additional converted production wells. The results showed a steep increase in methane production accompanied by the rapid breakthrough of N<sub>2</sub>. This breakthrough resulted from a ten-fold increase in the cleat permeability; interestingly, this is the

opposite behavior of what happened at the Allison Unit. At Allison, permeability measurements at the site using pressure transient testing revealed a permeability decrease from 100 to 1 md. As expected, this hundred-fold reduction in permeability resulted in a significant loss of CO<sub>2</sub> injectivity. In addition, the high CO<sub>2</sub> storage capacity of these coals, combined with a declining injection rate due to coals swelling, resulted in no CO<sub>2</sub> breakthrough during the six-year test, although methane production did improve, albeit not as dramatically as at the Tiffany N<sub>2</sub>-ECBM test site. These results indicate that in cases where the rank and permeability are not adequate for ECBM and storage operations, there may be opportunities to look at pulsing and/or mixing N<sub>2</sub> into the injection stream to improve injectivity during storage and ECBM operations.

- The Pump Canyon CO<sub>2</sub>-ECBM/storage demonstration, conducted as part of the Southwest Regional Partnership for Carbon Sequestration (SWP), involved a new CO<sub>2</sub> injection well drilled into Fruitland coals within an existing CBM production operation by ConocoPhillips [11]. CO<sub>2</sub> injection in three coal seams was initiated in late July 2008 and stopped in August 2009. A variety of monitoring, verification and accounting (MVA) methods were employed to track the movement of the CO<sub>2</sub>. Detailed geologic characterization and reservoir modeling was implemented in order to reproduce and understand the behavior of the reservoir. No CO<sub>2</sub> breakthrough occurred. Overall, 9 million cubic meters of CO<sub>2</sub> were injected at rates up to 70,000 cubic meters per day. However coal swelling and reservoir pressuring decreased injectivity, with injection rates decreasing to 14,000 cubic meters per day. The effectiveness of methane recovery and CO<sub>2</sub> storage was determined to probably be limited due to the small amount of CO<sub>2</sub> injected.

**Other small-scale demonstration projects by the USDOE's Regional Carbon Sequestration Partnerships (RCSP).** In addition to the Pump Canyon project, three other small-scale projects were conducted as part of the RCSP program to assess the potential for ECBM recovery and CO<sub>2</sub> storage in a variety of settings. Three of these are summarized below:

- The Midwest Geological Sequestration Consortium (MGSC) conducted a pilot test to determine the ECBM recovery potential and CO<sub>2</sub> injection and storage capability at a site in Wabash County, Illinois. The target formation was the Pennsylvanian Carbondale formation at a depth of 275 meters in a 2 meter thick Springfield Coal. Pre- and post-CO<sub>2</sub> injection coal permeability was estimated with water in a pressure transient test. A CO<sub>2</sub> micro pilot injection test to assess coal swelling and permeability reduction was conducted with three monitoring wells aligned with the natural cleat system. Pre-injection site MVA began in February 2007. Four wells were drilled and completed (three monitoring and one injection) by May 2008. CO<sub>2</sub> injection began in the summer of 2008 with a total of 91 metric tons of CO<sub>2</sub> injected. Methane gas production was noted at the face and butt cleat monitoring wells, and CO<sub>2</sub> was observed at all monitoring wells. No reduction in injection rate attributable to CO<sub>2</sub> swelling was observed [12].
- The Plains CO<sub>2</sub> Reduction Partnership (PCOR) conducted a coal seam test where approximately 80 metric tons of CO<sub>2</sub> was injected into unmineable lignite seams of the Williston Basin in Burke County, North Dakota, at a depth of approximately 370 meters, to determine the suitability of these strata for both CO<sub>2</sub> storage and ECBM production. One CO<sub>2</sub> injection well and four monitoring wells were completed in a five-spot pattern during the summer of 2007. Site characterization work revealed the existence of multiple coal seams with sufficient areal extent and low-permeability clay layers above and below the target seam. CO<sub>2</sub> was injected in March 2009, providing 80 metric tons over a 16 day period. Seismic imaging revealed the extent of the CO<sub>2</sub> plume, and enabled estimation of CO<sub>2</sub> migration and occupation within the coal. Down-hole instruments measuring pressure and fluid pH in monitoring wells proved to be a successful in corroborating seismic data and logging results, which enhanced the determination of the fate of the injected CO<sub>2</sub>. Indications are that the injected CO<sub>2</sub> migrated within the coal formation and was contained within the expected injection zone [13].
- One project in the Southeast Regional Carbon Sequestration Partnership (SECARB), the Black Warrior Basin Coal Test, took place in the Blue Creek Coal Degasification Field near Tuscaloosa County, Alabama. An existing CBM well was utilized for injection into the coal seams of the Pennsylvanian-age Pottsville Formation, and three monitoring wells were drilled and instrumented. Three coal seams -- the Black Creek, Mary Lee and Pratt --, with depths ranging from 305 to 610 meters, were targeted. The plan was to inject about 900 metric tons of CO<sub>2</sub> (approximately 300 metric tons per coal seam). However, based on operator preference and concern over fugitive migration of the CO<sub>2</sub>, just over 270 metric tons of CO<sub>2</sub> were injected between June and August of 2010 [14, 15].

**DOE-funded projects by CONSOL and Virginia Tech University in the USA.** Finally, several other DOE funded projects have taken place or are underway in the Central Appalachian Basin in the U.S. to assess storage opportunities in unmineable coal seams. One project planned to inject 900 metric tons of CO<sub>2</sub> into multiple coal seams of the Pocahontas and Lee Formations at depths ranging between 425 and 670 meters. A detailed regional assessment was completed of the potential Central Appalachian Basin CO<sub>2</sub> storage capacity. A comprehensive suite of production maps for the active CBM wells in the Central Appalachian Basin was developed. Preliminary reservoir modeling on the test site was completed. Site selection was completed on a donated CNX Gas CBM well, along with the initial reservoir modeling, site permitting, and well design for the field test site. Injection occurred from January

15 to February 9, 2009. Post-injection monitoring activities verified the CO<sub>2</sub> has remained in the coal seams, but gas analysis has shown that the injected tracer is present in the offset producing CBM wells. Long term monitoring of the flow back is ongoing.

The Central Appalachia Basin Coal Test under SECARB has two additionally funded follow-on projects. One project, located in an active CBM field in Buchanan County in southwest Virginia, plans to inject 20,000 metric tons of CO<sub>2</sub> into a series of thin, unmineable coal seams. The reservoir consists of approximately 15 coal seams, distributed over 270 meters of section. This reservoir geometry creates an unusual target for CO<sub>2</sub> injection, and is also challenging for many monitoring and imaging techniques. The project aims to reduce this uncertainty by designing and implementing characterisation, injection and monitoring activities to test stacked formations and track the migration of CO<sub>2</sub> throughout the injection and post-injection phases. A detailed geological characterisation of the proposed injection site indicates that regional geological structures, coal permeability and reservoir seals are adequate for the 20,000 metric ton test. The proposed research will provide needed information on other stacked storage options and provide an additional benefit of proven carbon storage potential in coal seams with ECBM and other stacked unconventional formations in Central Appalachia [16, 17]. Up to three CBM production wells will be converted for use as injection wells. The goals are to test the injection and storage potential of the coal seams and to assess the potential for ECBM recovery at offset wells.

The second follow-on project in the Appalachian Basin is the evaluation of the potential application of geomechanical models in coal seam reservoir simulation of CO<sub>2</sub> geologic sequestration and ECBM recovery. This work, led by the Virginia Center for Coal and Energy Research at Virginia Tech University, will examine the potential of geomechanical models to better account for the physical processes that occur during CBM production and CO<sub>2</sub> injection and storage. The results of this study could be potentially used for improving modeling of reservoir simulators, which rely on analytical models to describe pressure-permeability relationships.

**Coal-Seq Consortium.** The U.S. DOE-sponsored Coal-Seq Consortium (Coal-Seq) has also been underway for 14 years with the purpose of advancing the science of CO<sub>2</sub> storage in unmineable coal seams and gas shale reservoirs [18]. The initial Coal-Seq Project, which ran from 2000 – 2004, was solely DOE funded. Subsequent phases have been joint DOE/industry funded. The Coal-Seq Consortium is a consortium of government, academia, and industry charged with developing and producing models for permeability and injectivity of CO<sub>2</sub> in coal and shale.

The primary project goal of the current Coal-Seq III Consortium is to develop a set of robust mathematical modules to accurately predict how coal and shale permeability and injectivity change with CO<sub>2</sub> injection. This is to include improved capabilities in three key areas: (1) changes in coal mechanical strength properties and thus permeability in the presence of high pressure CO<sub>2</sub>; (2) changes in cleat and matrix swelling and shrinkage of coals and thus permeability due to injection of CO<sub>2</sub> under field replicated conditions, and (3) rigorous modeling of CO<sub>2</sub> and other gas adsorption behavior in wet coals, with water as a separate adsorption component.

In terms of continued validation, Coal-Seq III will validate the theoretical and experimental results with data from large-scale field projects; explore the feasibility of storing CO<sub>2</sub> in gas shale reservoirs; using the newly generated simulation modules; assess the CO<sub>2</sub> storage potential of the San Juan Basin's Fruitland Coal; disseminate the project findings to industry, regional sequestration partnership working groups, and the scientific/ engineering communities via publications and presentations; and foster continued international collaboration on CO<sub>2</sub> storage in coal seams and shale reservoirs via the website and fora. This work is still underway, with most of the work to be published in 2014 or 2015.

**Summary of Lessons Learned from R&D to Date.** Research to date demonstrates that there may be cases where CO<sub>2</sub>-ECBM can be technically and economically successful. Review of efforts to date highlight key lessons applicable to CO<sub>2</sub>-ECBM and CO<sub>2</sub> storage in coal beds [19]:

- With a depleted reservoir due to previous gas production operations, initial injection rates can be quite robust.
- Injection rates will decline due to re-pressurization and swelling of the coal reservoir.
- The presence of hydraulic fractures may complicate things.
- N<sub>2</sub> (as a tracer) may be a strong indicator of pending breakthrough.

In cases where the rank and permeability are not adequate for enhanced recovery and storage operations, there may be opportunities for pulsing and or mixing N<sub>2</sub> into the injection stream to improve injectivity during storage and enhanced recovery operations. Moreover, while the executed field tests to date do provide some insights into the long-term viability of enhanced recovery and storage in shales and coal seams, it is clear that there is much more to learn.

*Nonetheless, despite a number of setbacks, the sum total of the "lessons learned" from past and ongoing R&D activities continues to confirm that ECBM and CO<sub>2</sub> storage (perhaps in combination with N<sub>2</sub> injection) can be commercially viable, and should continue to be included in the set of potentially viable options under consideration for CO<sub>2</sub> storage.*



#### 4. Estimating the Global CO<sub>2</sub> Storage Capacity in Coal Seams

To assess CO<sub>2</sub> storage potential in worldwide coals, geologic and CBM resource data for major world basins was obtained from a variety of sources. Previous studies have established estimates of adsorption ratios based on vitrinite reflectance (Ro) data, which can be used with resource in place estimates to determine a theoretical maximum CO<sub>2</sub> storage potential.

Coals first need to be dewatered and degassed in order to reach conditions that are acceptable for injection. Additionally, coal maturity and homogeneity can change within the confines of the basin, leading to higher performing sweet spots. Therefore, estimates for CO<sub>2</sub> storage potential for the world's coal basins were based on an estimate of the amount of methane produced from each coal seam, both in terms of conventional CBM production, as well as that produced from the application of ECBM.

The overall approach to this study, building on previous work focused on U.S. basins [20], was to estimate the CO<sub>2</sub> storage potential of the world's coal basins in several steps. The first step involves estimating the replacement of methane produced by primary production with CO<sub>2</sub>, according to the representative coal rank defined for each basin. This step assumes that a storage capacity voidage is created in the coal reservoir by the CBM production, which can be replaced, up to original reservoir pressure, by CO<sub>2</sub>. Under this scenario, no incremental methane recovery is assumed to occur as a result of CO<sub>2</sub> injection.

The second step involves estimating the recovery of additional methane, unrecovered by primary production, as a result of CO<sub>2</sub> injection for ECBM, which creates additional voidage, and hence additional CO<sub>2</sub> storage capacity.

In some cases, estimates were developed for individual basins within a country, and then summed to the country level. In other cases, basin-specific numbers were not available, so country-specific estimates were developed.

The general methodology employed is summarized below.

**Select Basins to Include in Assessment.** The key criteria used for basin/country selection included the size of its potential (i.e., CO<sub>2</sub> storage and ECBM), as well as the availability of required information such as estimates of CBM resources in-place and/or recoverable. This was not available for all basins. Nonetheless, estimates could be developed for basins/countries representing over 90% of the world's coal reserves. Estimates of in-place and/or recoverable resources were either obtained from the literature, or were based on previous country/basin specific estimates developed by Advanced Resources (summarized in **Table 1**). Note that insufficient data were available for some countries to make estimates, even though these countries are believed to have some potential.

**Specify Coal Rank Most Representative of the Basin.** Although recognizing that coals of various ranks often exist within a given basin or coal seam, for this assessment, we determined a specific coal rank most representative of each basin/country considered. This was based on information and resource characterizations obtained in the literature, or developed as the result of previous work by Advanced Resources.

**Estimate Technically Recoverable "Primary" CBM Resources.** In some areas, like those in the U.S. and the countries summarized in Table 1, estimates for recoverable CBM resources were already developed by Advanced Resources. In others, estimates were obtained from other sources in the literature. Where estimates for CBM recoverable potential were not otherwise available, an estimated primary recovery factor of 10% was assumed, applied to the estimates of CBM resources in place. These results are summarized by region in Table 1. As shown, it is estimated that CBM resources in place is 201 Tcm (7,011 Tcf), with an estimated 29 Tcm (1,030 Tcf) recoverable. The largest CBM resource potential is in the former Soviet Union, Canada, China, Australia and the United States.

**Estimate Incremental Methane Recovery via CO<sub>2</sub>-ECBM.** This estimate was developed using a relationship between CO<sub>2</sub>-ECBM recovery factor (expressed as a % of in-place resource at the start of CO<sub>2</sub> injection) and coal rank. Another important component of this assessment is the relationship between coal rank and incremental methane recovery with CO<sub>2</sub> injection, or ECBM. As part of previous work by Advanced Resources [20], relationships were established based the *COMET2* reservoir simulator. The reservoir engineering constants used for the simulations provided the basis for these determinations, and are summarized in **Table 2**. **Figure 2** provides the relative permeability curves employed; **Figure 3** provides the CO<sub>2</sub> and methane isotherms used for each coal rank.

Based on these simulations, estimated recovery factors for the percentage of remaining in-place CBM resources at the start of CO<sub>2</sub> injection that can be recovered through the application of ECBM were developed based on estimates of vitrinite reflectance (Ro). An estimate of vitrinite reflectance was developed as a function of coal rank, based on the relationships in **Figure 4**.

Based on this representation, estimates of recovery factors as a function of average values for vitrinite reflectance, based on coal rank, were developed as summarized in **Table 3**. As shown, lower rank coals are assumed to have higher recoveries. This is because the lower coal ranks require less CO<sub>2</sub> and lower pressures to displace the in-place methane.

Assumptions for vitrinite reflectance and CO<sub>2</sub>/methane ratios were made for each basin/country assessed.

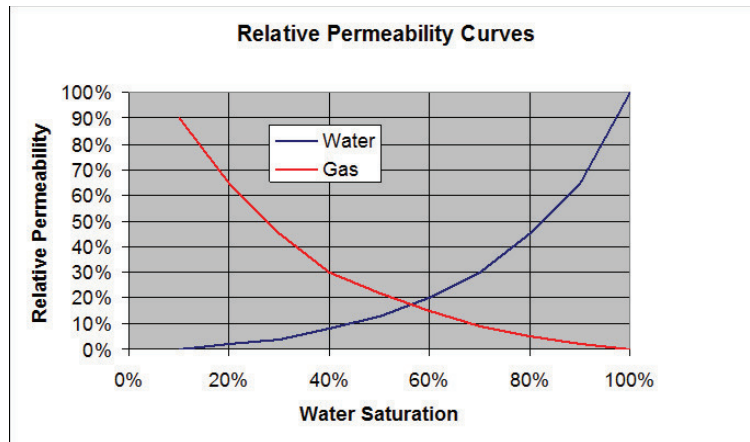
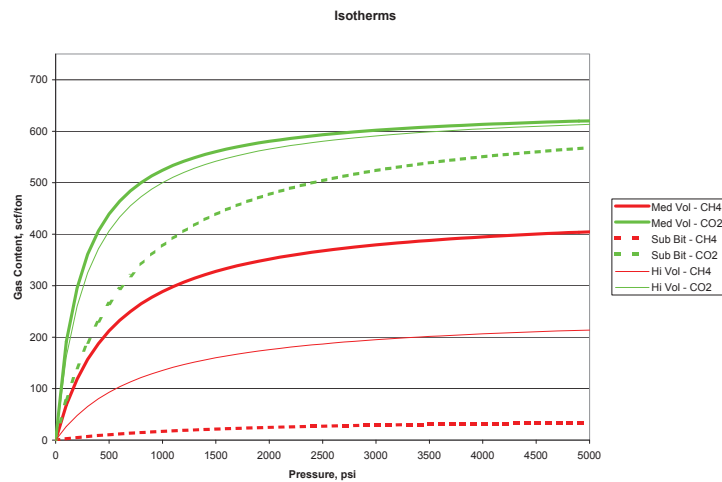
Table 1: Coal Bed Methane Resources by Country/Region

| COUNTRY                  | Coal Reserves<br>Million Tonnes | CBM Gas-in-place |      | CBM Recoverable |       |
|--------------------------|---------------------------------|------------------|------|-----------------|-------|
|                          |                                 | Tcf              | Tcm  | Tcf             | Tcm   |
| UNITED STATES            | 237,295                         | 1,746            | 49   | 170             | 4.82  |
| CANADA                   | 6,582                           | 550              | 15.6 | 184             | 5.21  |
| MEXICO                   | 1,211                           | 9                | 0.3  | 1               | 0.04  |
| North America            | 245,088                         | 2,305            | 65.3 | 355             | 10.06 |
| BRAZIL                   | 4,559 *                         | 36               | 1.0  | 5               | 0.15  |
| COLOMBIA                 | 6,746                           | 23               | 0.7  | 3               | 0.10  |
| VENEZUALA                | 479                             | 17               | 0.5  | 3               | 0.07  |
| Other S. & Cent. America | 724 *                           |                  | 0.0  | 0               | 0.00  |
| South & Central America  | 12,508                          | 76               | 2.2  | 11              | 0.32  |
| BULGARIA                 | 2,366                           |                  |      |                 |       |
| CZECH REPUBLIC           | 1,100                           | 13               | 0.4  | 2               | 0.06  |
| GERMANY                  | 40,699                          | 106              | 3.0  | 16              | 0.45  |
| GREECE                   | 3,020                           |                  | 0.0  | 0               | 0.00  |
| HUNGARY                  | 1,660                           | 4                | 0.1  | 1               | 0.02  |
| KAZAKHSTAN               | 33,600                          | 50               | 1.4  | 10              | 0.28  |
| POLAND                   | 5,709                           | 50               | 1.4  | 5               | 0.14  |
| ROMANIA                  | 291                             |                  |      |                 |       |
| RUSSIAN FEDERATION       | 157,010                         | 1,682            | 47.6 | 200             | 5.66  |
| SPAIN                    | 530                             |                  |      |                 |       |
| TURKEY                   | 2,343                           | 51               | 1.4  | 10              | 0.28  |
| UKRAINE                  | 33,873                          | 170              | 4.8  | 25              | 0.71  |
| UNITED KINGDOM           | 228                             | 102              | 2.9  | 15              | 0.43  |
| Other Europe & Eurasia   | 22,175                          |                  |      |                 |       |
| Europe & Eurasia         | 304,604                         | 2,228            | 63.1 | 284             | 8.04  |
| Botswana                 |                                 | 105              | 3.0  | 16              | 0.45  |
| Mozambique               |                                 | 88               | 2.5  | 13              | 0.37  |
| Namibia                  |                                 | 104              | 2.9  | 16              | 0.44  |
| South Africa             | 30,156                          | 60               | 1.7  | 9               | 0.25  |
| Zimbabwe                 | 502                             | 60               | 1.7  | 9               | 0.25  |
| Other Africa             | 1,034 *                         |                  |      |                 |       |
| Middle East              | 1,203 *                         |                  |      |                 |       |
| Middle East & Africa     | 32,895                          | 417              | 11.8 | 63              | 1.77  |
| AUSTRALIA                | 76,400                          | 153              | 6.4  | 34              | 0.95  |
| CHINA                    | 114,500                         | 1,299            | 36.8 | 195             | 5.52  |
| INDIA                    | 60,600                          | 80               | 2.3  | 20              | 0.57  |
| INDONESIA                | 5,529                           | 453              | 12.8 | 68              | 1.93  |
| Japan                    | 350                             |                  |      |                 |       |
| New Zealand              | 571                             |                  |      |                 |       |
| North Korea              | 600                             |                  |      |                 |       |
| Pakistan                 | 2,070 *                         |                  |      |                 |       |
| South Korea              | 126                             |                  |      |                 |       |
| Thailand                 | 1,239                           |                  |      |                 |       |
| Vietnam                  | 150                             |                  |      |                 |       |
| Other Asia Pacific       | 3,707                           |                  |      |                 |       |
| Asia Pacific             | 265,843                         | 1,985            | 58.2 | 316             | 8.96  |
| Total World              | 860,938                         | 7,011            | 201  | 1,030           | 29.15 |



**Table 2: Reservoir Constants Used in Simulation Model**

| Parameter             | Value                              |
|-----------------------|------------------------------------|
| Reservoir Pressure    | 0.43 psi/ft.                       |
| Reservoir Temperature | 60 deg + 2 deg/100 ft. , in deg. F |
| Porosity              | 0.25%                              |
| Cleat Spacing         | 0.5 inches                         |
| Sorption Time         | 10 days                            |
| Well Spacing          | 80 acres                           |

**Figure 2: Relative Permeability Curves Used in ECBM Simulation Runs****Figure 3: CO<sub>2</sub>/Methane Sorption Isotherms Used in ECBM Simulation Runs**

| Coal rank                |                               | Vitrinite<br>reflectance<br>(random) | Volatile<br>matter <sup>1</sup><br>(wt % dmmf) | Bed<br>moisture<br>(wt %)                                 | Calorific<br>value<br>MJ/kg<br>(moist, rmmf) | Hydro-<br>carbon<br>generation    | Principal uses                |                                   |
|--------------------------|-------------------------------|--------------------------------------|--|---|--|-----------------------------------|-------------------------------|-----------------------------------|
| Class                    | Group                         |                                      |  |   |  |                                   |                               |                                   |
| Anthracitic <sup>2</sup> | Meta-anthracite               | 2.50                                 | 2  |   |  | Dry<br>Gas                        | Space heating                 |                                   |
|                          | Anthracite                    |                                      | 8  |   |  |                                   | Chemical production           |                                   |
|                          | Semianthracite                |                                      | 14   |   |  |                                   |                               |                                   |
| Bituminous               | Low volatile<br>bituminous    | 1.92                                 | 22   | 8-10  | 32.6   | Wet<br>Gas                        | Metallurgical coke production |                                   |
|                          | Medium volatile<br>bituminous | 1.51                                 | 31   |   |  |                                   | Cement production             |                                   |
|                          | High volatile A<br>bituminous | 1.12                                 | 0.50-<br>0.75                                  |   |  |                                   | Oil and Gas                   | Thermal electric power generation |
|                          | High volatile B<br>bituminous | 0.75                                 |  |   |  |                                   |                               |                                   |
|                          | High volatile C<br>bituminous | 0.75                                 |  |   |  |                                   |                               |                                   |
|                          |                               | 0.50 ?                               |  |   |  |                                   |                               |                                   |
|                          | Subbituminous                 | Subbituminous A <sup>3</sup>         | 0.42   |   |  |                                   |                               | 26.8                              |
| Subbituminous B          |                               | 24.4                                 |  | Conversion to liquid and gaseous<br>petroleum substitutes |  |                                   |                               |                                   |
| Subbituminous C          |                               | 22.1                                 |  |   |  |                                   |                               |                                   |
| Lignitic                 | Lignite A                     |                                      |  | 19.3  |  | Thermal electric power generation |                               |                                   |
|                          | Lignite B                     |                                      |  | 14.7  |  | Char production                   |                               |                                   |
|                          | Peat                          |                                      |  | 75  |  |                                   | Space heating                 |                                   |

1) dmmf - Dry, mineral matter free

2) Non-agglomerating; if agglomerating, classified as low volatile bituminous

3) If agglomerating, classified as high volatile C bituminous

**Figure 33.1** Classification of coals by rank and indices of organic maturity. The chart is a composite modified from ASTM (1981), Teichmüller and Teichmüller (*in* Stach et al., 1982), Dow (1977) and Cameron (1989).

Figure 4: Classification of Coals Based on Rank and Thermal Maturity [20]

**Table 3: Recovery Factors by Coal Rank**

| Rank                       | Vitrinite Reflectance |      |      | ECBM Recovery Factor |
|----------------------------|-----------------------|------|------|----------------------|
|                            | Low                   | High | Avg  |                      |
| Anthracite                 | 2.5                   | 4    | 3.25 | 25%                  |
| Semi anthracite            | 1.92                  | 2.5  | 2.21 | 25%                  |
| Bituminous                 | 0.5                   | 1.92 | 1.21 | 42%                  |
| Low Volatile Bituminous    | 1.51                  | 1.92 | 1.72 | 25%                  |
| Medium Volatile Bituminous | 1.12                  | 1.51 | 1.32 | 32%                  |
| High Volatile A Bituminous | 0.75                  | 1.15 | 0.95 | 37%                  |
| High Volatile B Bituminous | 0.5                   | 0.75 | 0.63 | 42%                  |
| High Volatile C Bituminous | 0.5                   | 0.75 | 0.63 | 42%                  |
| Sub-bituminous             | 0.42                  | 0.5  | 0.46 | 42%                  |
| Lignite                    | 0.27                  | 0.42 | 0.35 | 21%                  |

**Estimate CO<sub>2</sub> Storage Capacity Associated with CBM and ECBM.** The relationship shown in Figure 2 was used to determine a CO<sub>2</sub>-to-methane replacement ratio as a function of coal rank, characterized in terms of vitrinite reflectance, for each coal basin. Then, CO<sub>2</sub> storage capacity was estimated based on simple replacement of produced methane with CO<sub>2</sub> that is produced. This applies to both the voidage resulting from primary CBM and the additional CO<sub>2</sub> storage capacity resulting from ECBM.

**Summary of Results.** All of the basin-specific assessments were combined to develop a global assessment of primary CBM recovery, ECBM recovery and CO<sub>2</sub> storage capacity in coal seams. Where possible, resource characterization information was developed at the basin level. However, this was not possible in all areas. Therefore, in some cases, the lowest level of disaggregation possible was at the country level.

The estimates for primary CBM and ECBM potential, along with the associated potential CO<sub>2</sub> storage capacity in unmineable coal seams, are presented, by basin/country, in Appendix C, and are summarized by country in **Table 4**. As shown, it is estimated that 79 Tcm of CBM are potentially recoverable globally, 29 Tcm from conventional CBM, and 50 Tcm from the application of ECBM. This would facilitate the potential storage of nearly 488 Gt of CO<sub>2</sub>.

This compares to the 1998 IEAGHG study for the more prospective basins [4, 21], that concluded that 40 Tcm was potentially recoverable globally, and would facilitate the potential storage of nearly 150 Gt of CO<sub>2</sub>.

The estimates presented here reflect only the CO<sub>2</sub> storage capacity associated with the coal seams that have been the target of advanced recovery operations. Coal seams usually occur in association with sandstones and other lithologies, and in many cases coal may not be the dominant rock type. Therefore, the storage capacity associated with coal seams is likely to be only a part of the storage capacity of the whole, coaly sediment unit. Injected CO<sub>2</sub> could (perhaps even preferentially) migrate through sandstones, shales, and/or coal seams, as part of a geologic sequence in a given location. This would imply that the storage potential in each region could be (perhaps substantially) larger than that just associated with coal seams.

Table 4: CO<sub>2</sub> Storage and Methane Production Potential of the World's Coal Basins

| COUNTRY                               | Estimated Methane Recovery (Tcm) |              |              | CO <sub>2</sub> Storage | CO <sub>2</sub> Storage |
|---------------------------------------|----------------------------------|--------------|--------------|-------------------------|-------------------------|
|                                       | PRIMARY                          | ECBM         | TOTAL        | Tcm                     | Gt                      |
| UNITED STATES                         | 4.82                             | 7.54         | 12.4         | 52.82                   | 86.16                   |
| CANADA                                | 5.21                             | 4.35         | 9.6          | 17.85                   | 29.11                   |
| MEXICO                                | 0.04                             | 0.09         | 0.1          | 0.34                    | 0.55                    |
| <b>Total North America</b>            | <b>10.06</b>                     | <b>11.99</b> | <b>22.1</b>  | <b>71.01</b>            | <b>115.82</b>           |
| BRAZIL                                | 0.15                             | 0.00         | 0.2          | 0.57                    | 0.93                    |
| COLOMBIA                              | 0.10                             | 0.22         | 0.3          | 1.29                    | 2.11                    |
| VENEZUELA                             | 0.07                             | 0.30         | 0.4          | 3.57                    | 5.83                    |
| <b>Total S. &amp; Cent. America</b>   | <b>0.32</b>                      | <b>0.52</b>  | <b>0.85</b>  | <b>5.44</b>             | <b>8.87</b>             |
| CZECH REPUBLIC                        | 0.06                             | 0.00         | 0.1          | 0.00                    | 0.00                    |
| GERMANY                               | 0.45                             | 0.00         | 0.5          | 0.62                    | 1.01                    |
| HUNGARY                               | 0.02                             | 0.04         | 0.1          | 0.10                    | 0.17                    |
| KAZAKHSTAN                            | 0.28                             | 0.00         | 0.3          | 0.50                    | 0.82                    |
| POLAND                                | 0.14                             | 0.94         | 1.1          | 4.07                    | 6.63                    |
| RUSSIAN FEDERATION                    | 5.66                             | 12.61        | 18.3         | 35.20                   | 57.41                   |
| TURKEY                                | 0.28                             | 0.00         | 0.3          | 0.58                    | 0.94                    |
| UKRAINE                               | 0.71                             | 1.72         | 2.4          | 4.54                    | 7.41                    |
| UNITED KINGDOM                        | 0.43                             | 1.03         | 1.5          | 2.73                    | 4.46                    |
| <b>Total Europe &amp; Eurasia</b>     | <b>8.04</b>                      | <b>16.35</b> | <b>24.39</b> | <b>48.34</b>            | <b>78.84</b>            |
| Botswana                              | 0.45                             | 1.06         | 1.5          | 9.18                    | 14.97                   |
| Mozambique                            | 0.37                             | 0.89         | 1.3          | 1.84                    | 3.01                    |
| Namibia                               | 0.44                             | 1.05         | 1.5          | 2.18                    | 3.56                    |
| South Africa                          | 0.25                             | 0.61         | 0.9          | 1.26                    | 2.05                    |
| Zimbabwe                              | 0.25                             | 0.61         | 0.9          | 3.44                    | 5.62                    |
| <b>Total Middle East &amp; Africa</b> | <b>1.77</b>                      | <b>4.22</b>  | <b>5.99</b>  | <b>17.90</b>            | <b>29.20</b>            |
| AUSTRALIA                             | 0.95                             | 0.67         | 1.62         | 9.01                    | 14.70                   |
| CHINA                                 | 5.52                             | 7.13         | 12.64        | 47.83                   | 78.01                   |
| INDIA                                 | 0.57                             | 0.63         | 1.2          | 4.04                    | 6.60                    |
| INDONESIA                             | 1.93                             | 8.05         | 9.97         | 95.40                   | 155.60                  |
| <b>Total Asia Pacific</b>             | <b>8.96</b>                      | <b>16.47</b> | <b>25.43</b> | <b>156.28</b>           | <b>254.91</b>           |
| <b>Total World</b>                    | <b>29.15</b>                     | <b>49.55</b> | <b>78.7</b>  | <b>298.97</b>           | <b>487.64</b>           |

### Acknowledgements

This paper summarizes, in part, work sponsored by the IEA Greenhouse Gas R&D Programme (IEAGHG), under contract No. IEA/CON/11/199.

### References

1. Puri, R., Yee, D., "Enhanced coalbed methane recovery," SPE Paper No. 20732 presented at the Society of Petroleum Engineers 65th Annual Technical Conference and Exhibition, New Orleans, LA, September 23–26, 1990
2. Gunter W.D., T. Gentzis, B.A. Rottenfusser, and R.J.H. Richardson, "Deep coalbed methane in Alberta, Canada: A fuel resource with the potential of zero greenhouse gas emissions," *Energy Conversion and Management*, Volume 38, Number unknown, pp. 217–222, 1997
3. Every, R.L. and Dell'osso Jr., L., "A new technique for the removal of methane from coal," *CIM Bulletin*, 65: 143–150, 1972
4. Gale, John and Paul Freund, "Coal-Bed Methane Enhancement with CO<sub>2</sub> Sequestration Worldwide Potential," *Environmental Geosciences*, Volume 8, Issue 3, pages 210–217, September 2001
5. [http://www.cslforum.org/publications/documents/CO2UtilizationOptions\\_Phase2FinalReport.pdf](http://www.cslforum.org/publications/documents/CO2UtilizationOptions_Phase2FinalReport.pdf)
6. IEAGHG, *Potential Implications on Gas Production from Shales and Coals for Geological Storage of CO<sub>2</sub>*, 2013/10, September 2013 ([http://www.ieaghg.org/docs/General\\_Docs/Reports/2013-10.pdf](http://www.ieaghg.org/docs/General_Docs/Reports/2013-10.pdf))
7. [http://www.ieaghg.org/docs/general\\_publications/8.pdf](http://www.ieaghg.org/docs/general_publications/8.pdf)
8. Advanced Resources International, *Technology Design and Implementation Plan for CO<sub>2</sub> Storage in Deep, Unmineable Coal Seams*, report prepared for U.S. Department of Energy, March 31, 2006
9. Advanced Resources International, Inc.; "The Allison Unit CO<sub>2</sub>–ECBM Pilot: A Reservoir Modelling Study", prepared for U.S. Department of Energy Project Number: DE-FC26-0NT40924, February, 2003; and Reeves S.R. and Oudinot, A.: "The Allison

- Unit CO<sub>2</sub>-ECBM Pilot – A Reservoir and Economic Analysis”, 2005 International Coalbed Methane Symposium, Paper 0523, Tuscaloosa, Alabama, May 16-20, 2005
10. Advanced Resources International, Inc.; “The Tiffany Unit N<sub>2</sub> – ECBM Pilot: A Reservoir Modeling Study”, prepared for U.S. Department of Energy Project Number: DE-FC26-0NT40924, June, 2004
  11. Oudinot, Anne Y., SPE, George J. Koperna, Jr., Zeno G. Philip, Ning Liu, Jason E. Heath, Arthur Wells, Genevieve B. Young, and Tom Wilson, “CO<sub>2</sub> Injection Performance in the Fruitland Coal Fairway, San Juan Basin: Results of a Field Pilot,” SPE Paper No. 127073-MS presented at the SPE International Conference on CO<sub>2</sub> Capture, Storage, and Utilization, 2-4 November 2009, San Diego, California, USA
  12. DOE/NETL, Midwest Geological Sequestration Consortium—Validation Phase (DOE/NETL Fact Sheet), July 2010 ([http://www.netl.doe.gov/publications/factsheets/project/Project682\\_8P.pdf](http://www.netl.doe.gov/publications/factsheets/project/Project682_8P.pdf))
  13. DOE/NETL, Plains CO<sub>2</sub> Reduction Partnership - Validation Phase (DOE/NETL Fact Sheet), July 2010 ([http://www.netl.doe.gov/publications/factsheets/project/Project687\\_8P.pdf](http://www.netl.doe.gov/publications/factsheets/project/Project687_8P.pdf))
  14. DOE/NETL, Southeast Regional Carbon Sequestration Partnership—Validation Phase (DOE/NETL Fact Sheet), July 2010 ([http://www.netl.doe.gov/publications/factsheets/project/Project683\\_4P.pdf](http://www.netl.doe.gov/publications/factsheets/project/Project683_4P.pdf))
  15. Southeast Regional Carbon Sequestration Partnership (SECARB) Central Appalachian Coal Seam Project (Fact Sheet), (<http://www.secarbon.org/files/central-appalachian-basin.pdf>)
  16. Litynski, John, Derek Vikara, Michael Tennyson and Malcolm Webster, “Using CO<sub>2</sub> for enhanced coalbed methane recovery and storage,” CBM Review, June 2014 (<http://www.keylogic.com/docs/default-source/documents/cbm-june-2014.pdf?sfvrsn=2>)
  17. Ripepi, Nino, “Storage and Utilization of CO<sub>2</sub> for Enhanced Gas Recovery in Southwest Virginia and Beyond,” Presentation to the 15<sup>th</sup> Annual Symposium, Environment Virginia, Lexington, VA, April 9, 2014
  18. The Coal-Seq III Consortium (website) (<http://www.coal-seq.com/index.asp>)
  19. Koperna, George J., and David Riestenberg, “Carbon Dioxide Enhanced Coalbed Methane and Storage: Is There Promise?” SPE Paper SPE 126627 presented at the 2009 SPE International Conference on CO<sub>2</sub> Capture, Storage, and Utilization held in San Diego, California, USA, 2–4 November 2009.
  20. Reeves, S.R., *Assessment of CO<sub>2</sub> Sequestration and ECBM Potential of U.S. Coalbeds*, Topical Report, Prepared for DOE/NETL Contract No. DE-FC26-00NT40924, February 2003
  21. Stevens, S. H., Kuuskraa, V. A., and Riemer, P. W. F., “CO<sub>2</sub> sequestration in deep coal seams: Pilot results and worldwide potential,” Proceedings of the Fourth International conference on Greenhouse Gas Control Technologies. Interlaken, published by Elsevier Science (pp. 175–180), 1999